
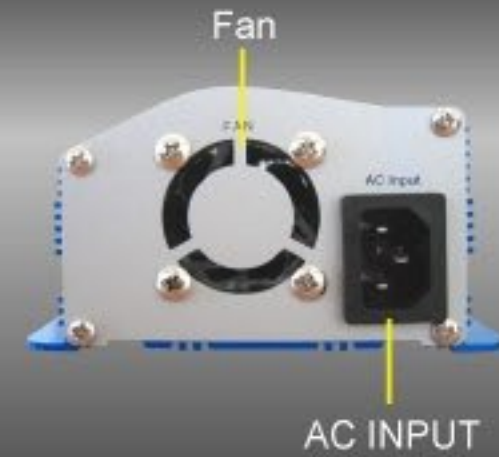


Multistage Battery Charger

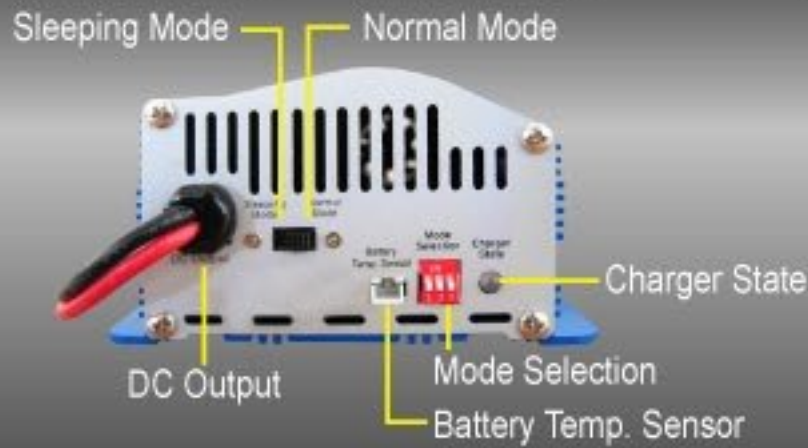


HT-C-10L-120-12 ; HT-C-5L-120-24

1. Cost-saving design.
2. Sleeping mode function.
3. Battery Temperature sensor function.
4. For recovery of the aging (sulfated) battery.
5. Tri-LED color indicator for different charge stage.
6. Adjustable switch for different lead-acid battery types.
7. Prevent the battery overcharging, and extend the battery life.


SPECIFICATION

Model		HT-C-10L-120-12					HT-C-5L-120-24				
INPUT	Voltage range	90 ~ 130VAC									
	Frequency range	45 ~ 65Hz									
	Efficiency	>=85%					>=85%				
	Power factor	0.6 (120VAC) at full load (±5%)									
	Input socket	IEC plug									
OUTPUT	Mode Selection	Mode 1	Mode 2	Mode 3	Mode 4	Mode 5	Mode 1	Mode 2	Mode 3	Mode 4	Mode 5
	Standby	14.7V, 0.7A	14.4V, 0.7A	14.4V, 0.7A	14.4V, 0.7A	15.3V, 0.7A	29.4V, 0.4A	28.8V, 0.4A	28.8V, 0.4A	28.8V, 0.4A	30.6V, 0.4A
	Bulk Stage	15.3V, 10A			14.4V, 0.7A	15.3V, 0.7A	30.6V, 5A			28.8V, 0.4A	30.6V, 0.4A
	Absorption stage (I)	14.7V, 10A-0A	14.4V, 10A-0A	14.4V, 10A-0A	14.4V, 0.7A-0A	15.3V, 0.7A-0A	29.4V, 5A-0A	28.8V, 5A-0A	28.8V, 5A-0A	28.8V, 0.4A-0A	30.6V, 0.4A-0A
	Absorption stage (II)	/	/	15.3V, 0.7A max	/	/	/	/	30.6V, 0.4A max	/	/
	Float stage	13.8V, 0.7A max					27.6V, 0.4A max				
	Max. current output	10A					5A				
	Continuous current output	10A					5A				
	Recommended battery capacity	30 ~ 100Ah (12V)					20 ~ 65Ah (24V)				
	Leakage current from battery	<1mA									
Sleeping Mode Function		YES (1/3 current output only)									
PROTECTION	Over temperature	55°C±5°C									
	Input terminal reverse	By fuse									
	Overload	YES									
	Output short circuit	YES									
	Microprocessor check	YES									
ENVIRONMENT	WORKING TEMP.	0°C ~ +30°C									
	WORKING HUMIDITY	20 ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-30°C ~ +70°C (-22°F ~ +158°F), 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.05%/°C (0 ~ 50°C)									
SIZE	Dimension (L x W x H)	232 x 122 x 65mm									
	Weight	1.4kgs									


Charging volt graph (0: OFF)

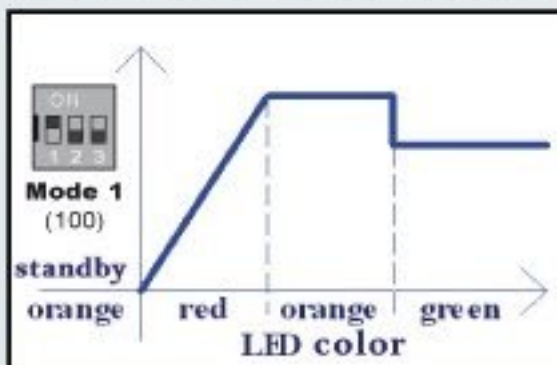


Mode 1: For lead storage battery.

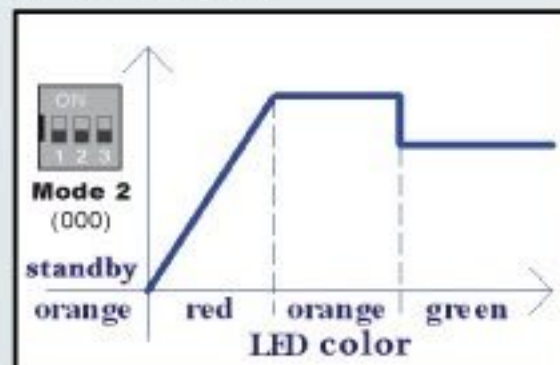


Mode 2: For gel battery.

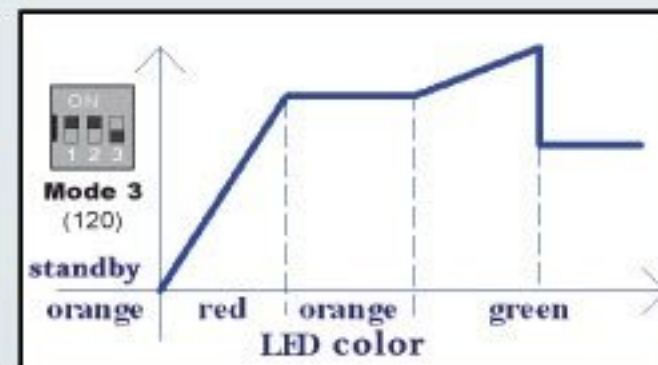

Mode 3: Suitable for re-charging lead storage battery, which is in good condition battery and completely disconnected from the devices it runs.


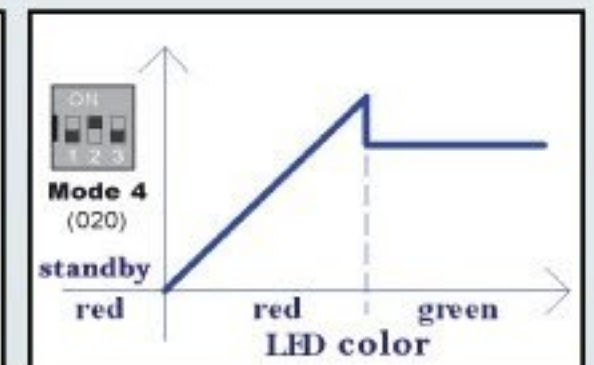


Mode 4: For recovery of sulfated (aging) gel battery.


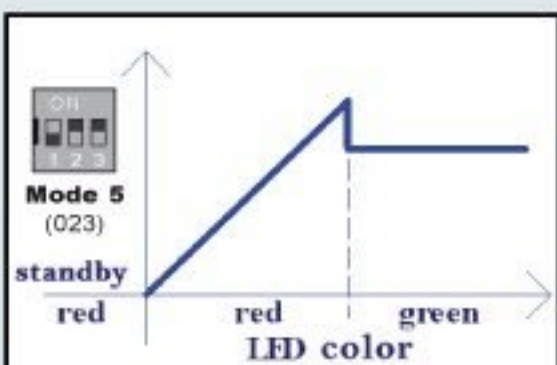


Mode 5: For recovery of sulfated (aging) lead storage battery.

Wire Type:

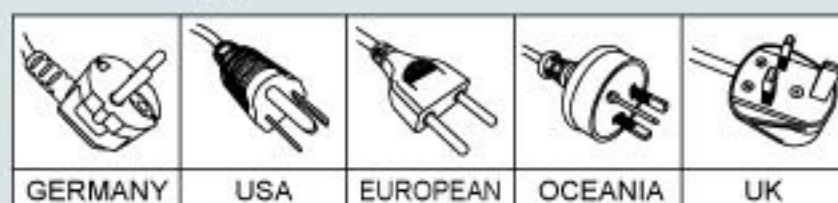

Multistage Battery Charger

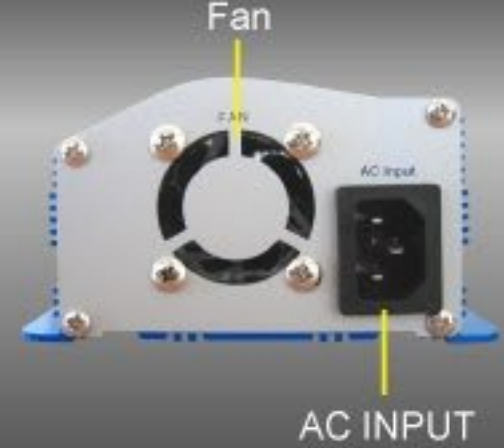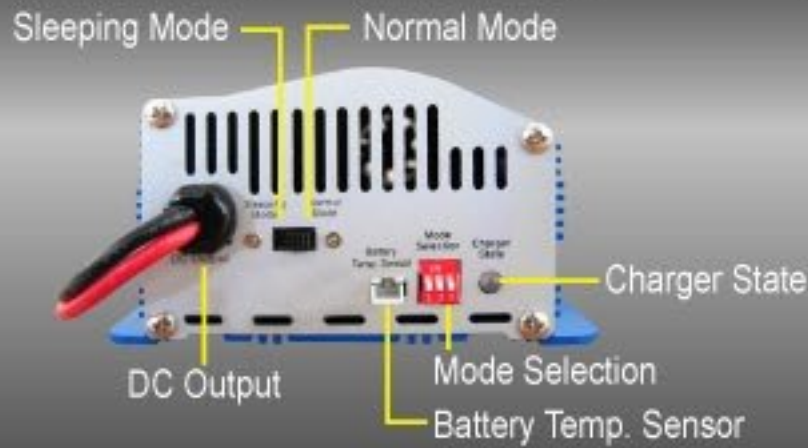


HT-C-15L-230-12 ; HT-C-7L-230-24

1. Cost-saving design.
2. Sleeping mode function.
3. Battery Temperature sensor function.
4. For recovery of the aging (sulfated) battery.
5. Tri-LED color indicator for different charge stage.
6. Adjustable switch for different lead-acid battery types.
7. Prevent the battery overcharging, and extend the battery life.


SPECIFICATION

Model		HT-C-15L-230-12					HT-C-7L-230-24				
INPUT	Voltage range	180 ~ 264VAC									
	Frequency range	45 ~ 65Hz									
	Efficiency	>=85%					>=88%				
	Power factor	0.6 (230VAC) at full load (±5%)									
	Input socket	IEC plug									
OUTPUT	Mode Selection	Mode 1	Mode 2	Mode 3	Mode 4	Mode 5	Mode 1	Mode 2	Mode 3	Mode 4	Mode 5
	Standby	14.7V, 1A	14.4V, 1A	14.4V, 1A	14.4V, 1A	15.3V, 1A	29.4V, 0.5A	28.8V, 0.5A	28.8V, 0.5A	28.8V, 0.5A	30.6V, 0.5A
	Bulk Stage	15.3V, 15A			14.4V, 1A	15.3V, 1A	30.6V, 7A			28.8V, 0.5A	30.6V, 0.5A
	Absorption stage (I)	14.7V, 15A-0A	14.4V, 15A-0A	14.4V, 15A-0A	14.4V, 1A-0A	15.3V, 1A-0A	29.4V, 7A-0A	28.8V, 7A-0A	28.8V, 7A-0A	28.8V, 0.5A-0A	30.6V, 0.5A-0A
	Absorption stage (II)	/	/	15.3V, 1A max	/	/	/	/	30.6V, 0.5A max	/	/
	Float stage	13.8V, 1A max					27.6V, 0.5A max				
	Max. current output	15A					7A				
	Continuous current output	15A					7A				
	Recommended battery capacity	45 ~ 150Ah (12V)					30 ~ 90Ah (24V)				
	Leakage current from battery	<1mA									
Sleeping Mode Function		YES (1/3 current output only)									
PROTECTION	Over temperature	55°C±5°C									
	Input terminal reverse	By fuse									
	Overload	YES									
	Output short circuit	YES									
	Microprocessor check	YES									
ENVIRONMENT	WORKING TEMP.	0°C ~ +30°C									
	WORKING HUMIDITY	20 ~ 90% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-30°C ~ +70°C (-22°F ~ +158°F) , 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.05%°C (0 ~ 50°C)									
SIZE	Dimension (L x W x H)	232 x 122 x 65mm									
	Weight	1.4kgs									


Charging volt graph (0: OFF)

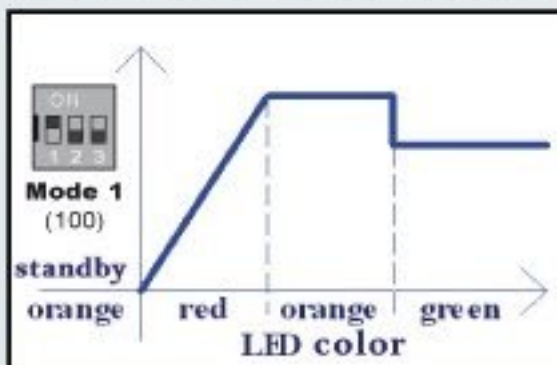


Mode 1: For lead storage battery.

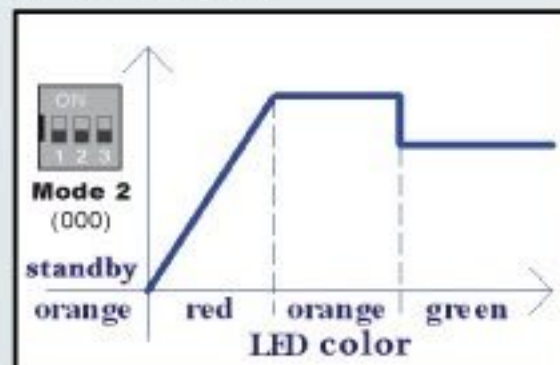


Mode 2: For gel battery.

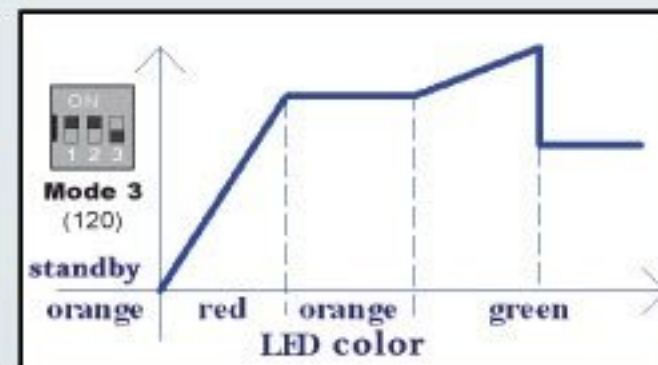

Mode 3: Suitable for re-charging lead storage battery, which is in good condition battery and completely disconnected from the devices it runs.

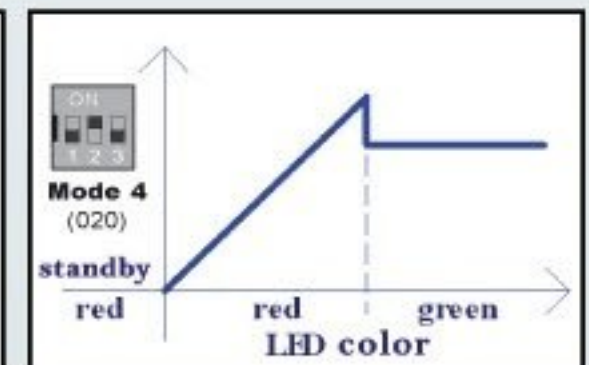

Mode 4: For recovery of sulfated (aging) gel battery.

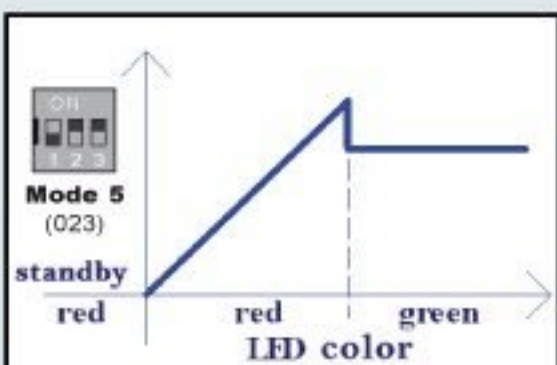

Mode 5: For recovery of sulfated (aging) lead storage battery.

Wire Type:

