



---

## SPECIFICATIONS - 2404SRM CHARGER



### Totally Automatic Switch-Mode Medical Battery Chargers

**"Suitable for Gel, Sealed & Wet Lead Acid Batteries in Medical Applications"**

**Summary: 24 Volts, 2.0Amp Constant Current**  
(equivalent to 4.0A tapered charger in charging time)

- **Universal Input 90VAC to 264VAC** - Suitable anywhere in the world.
- Automatic Cut-off and then true Float. Can be left connected indefinitely without harming the battery.
- **De-sulfation of battery**
- **UL, CSA, CE Listed for Medical Standard (UL2601-1, cUL, EN60601).**
- Meets FCC Class B; EN55022 Class B.
- Can also be used for On-board (internal) applications.
- Increases battery life by de-sulfating the battery.
- Many advance features described in this spec.
- **Very small size and very light weight**

### Explanation of the Features:

The advance technology of the OEM Battery Chargers supplied by Soneil is fundamentally different from other battery chargers. The conventional linear battery charger is an electrical device whereas the 2403SRM is a light weight sophisticated

electronic device.

1. **Switch-Mode Technology:**

Most of the battery chargers use linear technology, which convert the 115/230 VAC to 24 VDC at 60 or 50 Hz. This requires a large transformer, which has the disadvantage of lower efficiency resulting in higher heat generation, larger size and weight.

Soneil's Battery Charger transforms the 115/230 VAC into 24 VDC at 100,000 Hz (1667 times faster than conventional charger), which requires a much smaller transformer, and this results in a unit of smaller size, low weight and improved efficiency.

The 2403SRM uses sophisticated electronic circuitry with microchips and suitable for medical use. All present day computers use switch-mode technology.

2. **International Safety Approvals & Listing:**

**Medical Standard (UL2601-1, cUL, EN60601)**

Both North American (UL & cUL) and European (CE) approvals in a single charger.

Meets FCC Class B; EN55022 Class B

3. **Input Requirements:** Universal Input

a) 90VAC to 264VAC

b) 47 - 63 Hz

Very wide AC input tolerance. **Suitable for every part of the world.**

4. **Output:**

2.00 Amps Constant Current @ 24 Volts DC  
(Equivalent to 4.0 Amps tapered charger in charging time)

a) Line Regulation @ Full Load 2%

- b) Load Regulation @ 3%
- c) **Ripple Voltage**: Very low

The peak to peak ripple voltage into a resistive load is less than 200mV for the output voltage above 24 VDC.

### 5. **Charging Cycle**:

The charging curve is attached. The explanation of the charging cycle is as following.

Stages	Condition	Mode*	Current	Voltage	LED Indication
Stage 1	Charging Pulse mode	Pulse mode	2.00A Pulsing	0.5V to 5.0V	Orange
Stage 2	Constant Current mode	CC mode	2.00A	5.0V to 28.8.V	Orange
Stage 3	Constant Voltage mode	CV mode	Reduces from 2.00A***	Holds at 28.8V	Orange
Stage 4	Standby Voltage mode	Float Voltage mode	Reduces to zero	Maintains 27.6V	Green
	Recharging mode	CC mode	2.00A	<27.6V	Orange

- \* CC mode = Constant current charge
- \* CV mode = Constant voltage charge
- \*\*\* See Stage 3 description below

#### **Stage 1: Deep Discharge Charging Pulse Mode: LED Flash**

The charger starts charging at 0.5V and give pulse current up to 5V. This has effect of removing loose sulphation formed during deep discharge state of the battery.

#### **Stage 2: Constant Current Mode (CC): LED Orange**

The charger changes to constant current 2.00A. When the battery voltage reaches up to 28.8V, the charging stage changes from CC (Constant Current) to CV (Constant Voltage) mode.

#### **Stage 3: Constant Voltage Mode (CV): LED Green**

The charger holds the battery at 28.8V and the current slowly reduces. When the current reaches at 0.5C (C = Battery Capacity), this point called the Switching Point. The Switching Point is one of the great feature of this battery charger that it can adjust the current automatically according to battery capacity. Other chargers

are not capable to adjust the current automatically.

**Stage 4: Standby Voltage Mode: LED Green**

The charger maintains the battery voltage at 27.6V and current slowly reduces to zero. Charger can be left connected indefinitely without harming the battery.

**Recharging: LED Orange**

If the battery voltage drops down below 27.6V, the charger changes from any mode to Constant Current mode and restart charging. The charging cycle will go through Stage 2 to Stage 4.

**Soneil charger can charge gel, sealed or wet lead acid batteries without use of any switch.**

6. **Two colours and function in one LED:**

LED is used to show the charging status. When the LED is Orange, the charger is in charging or recharging mode and the current is 2.00A constant. When the LED Green, the charger is in Standby mode and no current (zero) is flowing.

7. **Protection:**

- a) **Reverse polarity protection** - provided
- b) **Short circuit protection** - provided
- c) **Over-Voltage Protection** - provided
- d) **Over current protection** - provided
- e) **AC Surge Protection** - provided
- f) **Soft start and stop:** Starts and stops gradually.

No sudden in-rush of current. This protects both the batteries and any other circuits connected to the charger.

8. **De-sulfation of battery:** The charger will remove loose sulfation and increase the battery life. (Hard sulfation cannot be reversed).

9. **No current drain:**

No (zero) current is taken from the battery when connected to battery but AC not plugged in. (Many other chargers in the market draw 30-40 mAmp which drains the battery.)

10. **Reliability:**

- a) **Mean Time between failures (MTBF)**: 50,000 power-on-hours (POH) or greater. This translates into 17 years of everyday operation of 8 hours.
- b) **Burn-in**: All chargers are burned in at an average DC load of 2.00 Amps.
- c) **Vibration Test**: The charger passed vibration test at the following test conditions:
  - Frequency: 5-55 Hz
  - Range: +/- 1.5 mm
  - Acceleration: 20m/s
  - Direction: X/Y/Z 3 directions
  - Test Time: 2 hours respectively
- d) **Drop Test**: The charger was dropped from a 1.0m height to a 10mm pine repeatedly for four times on each side with no cracks, breaks and no components getting loose or breaking.

11. **Electromagnetic Interference (EMI)**:

The charger will not generate excessive radiated or conducted emissions. No interference with TV, radio, computer or other equipment.

Meets FCC Class B; EN555022 Class B; IEC-801-3 (3V/M from 27MHZ to 1GHZ).

12. **Ground leakage current**:

The ground leakage current is less than 0.10mA, which complies with the requirements.


13. **Size**: **Very Small** Length - 4.7" (119 mm)  
Width - 2.4" (60 mm)  
Height - 1.5" (37 mm)

**Very Light Weight** 0.8 lbs (350 grams)

Ref: 2404SRM

# CHARGING CURVE MODEL 2404SRM

SONEIL 24V/2A MEDICAL CHARGER

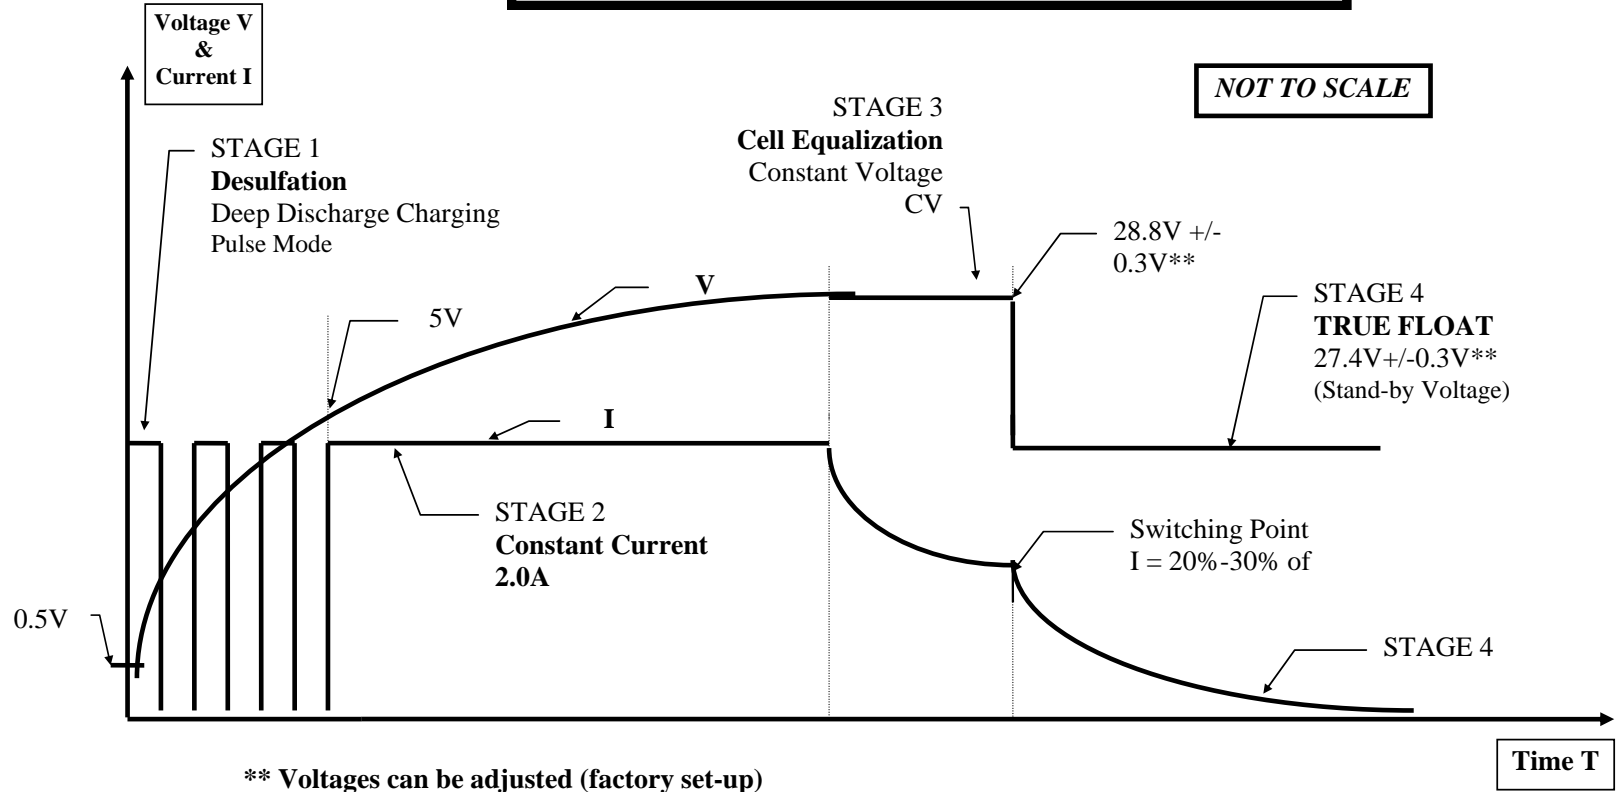

Ref: Curve2404SRM