

UE15WCP-SPA

Switching Power Adaptor
15Watt

Technical data

Input voltage	100-240V AC
Input current	400mA
Frequency	50-60Hz
Efficiency	60% typ, at full load
Output voltage tolerance	±5%
Low standby power	0.3W Max

Environmental specification

Operation temp	0°C to 40°C at maximum load
Storage temp	-20°C to 60°C
Humidity	5% to 95% non condensing

Safety specification



Safety approval	TUV-GS (EN60950 & EN60601) cULus (UL60950, UL60601, CSA60950 & CSA60601) CE Mark PSE-JET C-Tick (AS/NZS60950) CCC (GB4943) KETI (K60950)
-----------------	---

Reliability specification


MTBF calculation	50,000 hours at maximum load levels and an ambient temperature of 25°C (in correspondence with MIL-HDBK-217)
------------------	--

Mechanical specification

AC Plug	Main plugs are available for the following countries: China, USA, Japan, UK, EU, Australia & Korea
Weight	122g (not including AC plug) AC plug for China, USA, Japan: 10g AC plug for EU: 17g AC plug for Korea: 19g AC plug for UK: 27g AC plug for Australia: 15g
Dimensions	72.0mm x 42.5mm x 26.0mm (2.83" x 1.67" x 1.02")

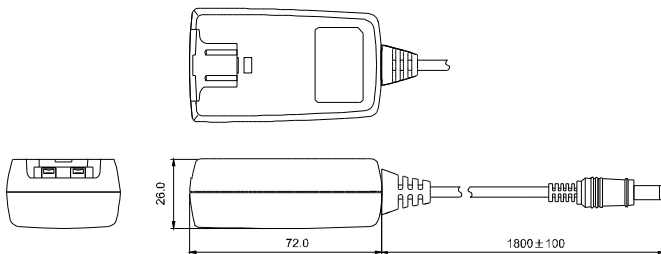

Unit:mm

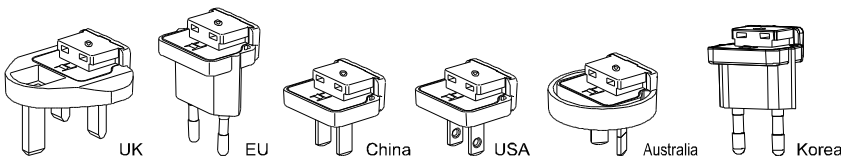

Output data

Model	Voltage (V)	Current (A)	Ripple (mV)	115		230	
				115	230	115	230
UE15WCP-030YYYYSPA	3.00	0.10-2.00	50	Y	Y	N	N
UE15WCP-033YYYYSPA	3.30	0.10-2.00	50	Y	Y	N	N
UE15WCP-036YYYYSPA	3.60	0.10-2.00	50	Y	Y	N	N
UE15WCP-040YYYYSPA	4.00	0.10-2.00	50	Y	Y	N	N
UE15WCP-042YYYYSPA	4.20	0.10-2.00	50	Y	Y	N	N
UE15WCP-045YYYYSPA	4.50	0.10-2.00	50	Y	Y	N	N
UE15WCP-050YYYYSPA *	5.00	0.10-2.00	50	Y	Y	N	N
UE15WCP-052YYYYSPA *	5.20	0.10-2.00	50	Y	Y	N	N
UE15WCP-055YYYYSPA *	5.50	0.10-2.00	50	Y	Y	N	N
UE15WCP-060YYYYSPA *	6.00	0.10-2.00	100	Y	Y	N	N
UE15WCP-065YYYYSPA *	6.50	0.10-2.00	100	Y	Y	N	N
UE15WCP-070YYYYSPA	7.00	0.10-1.70	100	Y	Y	N	N
UE15WCP-075YYYYSPA	7.50	0.10-1.50	100	Y	Y	N	N
UE15WCP-080YYYYSPA	8.00	0.10-1.50	100	Y	Y	N	N
UE15WCP-085YYYYSPA	8.50	0.10-1.40	100	Y	Y	N	N
UE15WCP-090YYYYSPA	9.00	0.10-1.30	100	Y	Y	N	N
UE15WCP-100YYYYSPA	10.0	0.10-1.25	100	Y	Y	N	N
UE15WCP-105YYYYSPA	10.5	0.10-1.25	100	Y	Y	N	N
UE15WCP-120YYYYSPA	12.0	0.10-1.25	100	Y	Y	N	N
UE15WCP-138YYYYSPA	13.8	0.10-1.00	150	Y	Y	N	N
UE15WCP-150YYYYSPA	15.0	0.10-0.90	150	Y	Y	N	N
UE15WCP-160YYYYSPA	16.0	0.10-0.85	200	Y	Y	N	N
UE15WCP-175YYYYSPA	17.5	0.10-0.80	200	Y	Y	N	N
UE15WCP-180YYYYSPA	18.0	0.10-0.80	200	Y	Y	N	N
UE15WCP-240YYYYSPA	24.0	0.10-0.63	200	Y	Y	N	N

YYY:010-200 Stands for current:0.10-2.00A
CP-Changeable AC Plug

Greenway Business Centre
Harlow Business Park,
Harlow, Essex, CM19 5QE, UK.
tel: 01279 406960
fax: 01279 406960
email: sales@whatpowersupply.com
web: www.whatpowersupply.com

